

## Standard Equipment /Optional Equipment

### Standard Equipment

Narrow chassis width 820mm  
 Key switch or PIN Code access  
 Multifunction coloured display as well as hourmeter, maintenance indication, battery discharge indicator and internal fault code indication  
 Power assisted steering  
 Automatic speed reduction when cornering  
 ECO-Mode with up to 12% energy savings  
 3 kW AC motor (maintenance free)  
 Drive wheel position mentioned in display

CAN bus technology  
 Lateral battery change 3PzS available with an ergonomic battery un/locking with lever & rollers (l2=1037mm)  
 Overhead guard  
 Soft landing on forks  
 Drive wheel Polyurethane  
 Single load wheel Polyurethane  
 Width over fork carriage: 560mm  
 Fork carriage length: 1150mm  
 Protection -10°C

### Optional Equipment

Drive wheels: cushion rubber, synthetic cushion rubber non marking, wet grip  
 Load wheels: tandem polyurethane, tandem polyurethane greasable  
 Lateral battery change 4PzS available with ergonomic battery un/locking with lever & rollers (l2=1112mm)  
 Leather seat & seat heating  
 Different Standard and Duplex masts with maximum lift height 2344mm  
 Load backrests with h=100mm  
 Floor compensator  
 Speed reduction if forks lowered

Mast Protection: polycarbonate, steel mesh  
**Linde Connected Solutions:**  
 ac:access control (PIN or RFID Dual), an: usage analysis and dt: crash detection  
 Flashing beacon  
 Support Clipboard DIN A4 & panoramic mirror  
 Support data terminal incl. power supply cable 24V  
 Mobile or Fixed battery stand  
 Automatic battery watering system  
 Cold store protection -35°C

#### Other options available on request

#### Li-ION

Rapid Full Charge  
 Opportunity Charging  
 Rapid Intermediate Charging  
 Maintenance Free  
 Extended Lifetime  
 Efficient performance in Cold Stores  
 Side Plug available

#### Li-ION Batteries

fits in 4 PzS SL compartment : 4,5kWh-9kWh (205Ah-410Ah) includes battery housing extra weight  
**Li-ION charger**  
 optimized 24V-Charger v255: full charging time 1h30min (4,5kWh) and 2h40min (9,0kWh)



## Seated Double Pallet Stacker Capacity 1,200 kg D 12 R

Series 1164

## Features

### Ergonomics

- Ergonomic operator's compartment with fabric or leather seat available incorporating three independent adjustments
- Heated seat available as an option
- Padded hand grip for easy access and an adjustable floor plate to suit individual operator's
- 90° Side-stance seating posture ensures excellent visibility in both directions of travel
- Overhead guard design provides optimum visibility



### Lifting systems

- Lift control provides accurate lifting as well as smooth, quiet operation
- Soft landing on forks protects the load when lowering
- Initial lift independent of main lift
- Max. lift height up to 2344mm
- Max. load capacity in Stacker use : 1,200kg on load arms
- Max. load capacity when Double-Stacking : 1000kg on forks/1000kg

### Handling

- Chassis width b1= 820mm
- Small l2 dimension = 1037mm
- High maneuverability when operating in lorries or confined spaces
- High seated position for good visibility
- Stable 4 point configuration
- Pallet stop for fast, efficient stacking of two pallets

### TipControl®

- Traction, lift controls, initial lift and horn grouped in one single ergonomic unit
- Enables intuitive, fatigue-free operation of all controls
- Height adjustable hand support

### Drive control and settings

- Steering effort adjusts automatically relative to speed and turning radius
- Speed is automatically reduced in relation to the steering angle
- Speed profiles available
- ECO-Mode up to 12% energy savings to finish shift with low battery status



### Workstation

- Multifunctional instrument display with a user-friendly menu structure
- Truck access control by PIN code or ignition key
- Support clipboard DIN A4, flashing beacon available as options
- Emergency isolator located for instant actuation



### Comprehensive energy solutions

- 24V batteries : capacities from 345 Ah (3PzS) to 500 Ah (4PzS)
- Standard Lateral change including rollers inside the battery compartment to aid battery change
- Lever initiates battery change preventing direct contact
- Li-ION batteries with 4,5kWh(205Ah) and 9,0kWh(410Ah)
- Fast full charge in 1h30min with optimized charger



### AC drive motor

- Powerful, 3 kW drive motor
- Moisture and dust proof maintenance-free, AC drive motor
- Gradient performance of max. 15% (laden)
- No roll back on gradient starts
- High torque motor negotiates loading docks with ease

### Safety

High productivity combined with safety. The operator's body always remains within the chassis contours. An overhead guard provides additional protection. A dead-man foot switch actuates an electromagnetic brake on the drive wheel for impressively smooth and rapid stopping performance when required.

### Performance

One of the truck's many is its highly efficient productivity performance. The compact and powerful 3 kW AC drive unit enables precise manoeuvring, with speeds up to 10 km/h. With capacities up to 2,000 kg, the Linde Seated Double Stacker is designed to load/unload and or transfer two double-stacked pallets simultaneously. It can also be used as a normal stacker to store and retrieve 1,200 kg loads in narrow aisles.

### Comfort

The 90° seating position incorporating a padded armrest provides the operator with an ergonomic work station and effortless access to all operating controls. Three independent seat adjustments are complemented by an adjustable floorplate to suit each operator's preferences

Linde Material Handling

Linde

### Reliability

Rugged construction and the use of tried and tested components make this a truck that can be relied on. Motor, sub-components and electronics are all protected within the robust chassis structure. A pallet stop ensure durability of lifting units. These features guarantee a longer operating life combined with fast, safe and highly efficient load handling.

### Service

Efficiency at work and efficiency in servicing with cost effective maintenance routines. Easy access to all components and maintenance-free technology also play their part in increasing truck uptime and availability. CAN bus connectivity provides a computerised diagnostic system for rapid analysis so that maintenance intervals are also minimised for maximum uptime.

Linde Material Handling GmbH, Postfach 10 01 36, 63701 Aschaffenburg, Germany Phone +49.6021.99-0, Fax +49.6021.99-1570, www.linde-mh.com, info@linde-mh.com




# Technical Data according to VDI 2198

Characteristics	1.1	Manufacturer	LINDE	
	1.2	Manufacturer's type designation	<b>D12R</b>	
	1.2a	Series	1164-01	
	1.3	Power unit	Battery	
	1.4	Operation	Seat	
	1.5	Load capacity/Load	Q (t)	1.2 / 2.0 <sup>1)2)</sup>
	1.6	Load centre distance	c (mm)	600
	1.8	Axle centre to fork face	x (mm)	950 (835) <sup>3)4)</sup>
	1.9	Wheelbase	y (mm)	1824 (1709) <sup>3)4)</sup>
Weights	2.1	Service weight	(kg)	1451 <sup>5)6)</sup>
	2.2	Axle load with load, front/rear	(kg)	1402 / 2049 (1267 / 2184) <sup>5)7)7)</sup>
	2.3	Axle load without load, front/rear	(kg)	992 / 459 <sup>5)6)</sup>
Wheels/Tyres	3.1	Tyres rubber, SE, pneumatic, polyurethane	V+P/P <sup>8)9)</sup>	
	3.2	Tyre size, front	Ø 254 x 102	
	3.3	Tyre size, rear	Ø 85 x 85 (Ø 85 x 60) <sup>10)</sup>	
	3.4	Auxiliary wheels (dimensions)	Ø 140 x 50	
	3.5	Wheels, number front/rear (x = driven)	1x + 2 / 2 (1x + 2 / 4) <sup>10)</sup>	
	3.6	Track width, front	b10 (mm)	541 <sup>9)</sup>
Dimensions	3.7	Track width, rear	b11 (mm)	380 <sup>9)</sup>
	4.2	Height of mast, lowered	h1 (mm)	1665 <sup>9)</sup>
	4.3	Free lift	h2 (mm)	150 <sup>9)</sup>
	4.4	Lift	h3 (mm)	2344 <sup>9)</sup>
	4.5	Height of mast, extended	h4 (mm)	2864 <sup>9)</sup>
	4.6	Initial lift	h5 (mm)	125
	4.7	Height of overhead guard (cabin)	h6 (mm)	2260
	4.10	Height of reach legs	h8 (mm)	80 <sup>11)</sup>
	4.15	Height, lowered	h13 (mm)	86 <sup>11)</sup>
	4.19	Overall length	l1 (mm)	2187 <sup>9)</sup>
	4.20	Length to fork face	l2 (mm)	1037 <sup>9)</sup>
	4.21	Overall width	b1/b2 (mm)	820 <sup>9)</sup>
	4.22	Fork dimensions DIN ISO 2331	s/e/l (mm)	55 x 180 x 1150 <sup>12)</sup>
	4.24	Width of fork carriage	b3 (mm)	780 <sup>9)</sup>
	4.25	Fork spread	b5 (mm)	560 <sup>9)</sup>
	4.26	Distance between wheel arms/loading surfaces	b4 (mm)	255 <sup>9)</sup>
	4.32	Ground clearance, centre of wheelbase	m2 (mm)	20 <sup>13)</sup>
	4.34.1	Aisle width for pallets 1000 x 1200 crossways	Ast (mm)	2814 (2834) <sup>3)14)</sup>
	4.34.2	Aisle width with pallet 800 x 1200 along forks	Ast (mm)	2684 (2754) <sup>3)14)</sup>
4.35	Turning radius	Wa (mm)	2012	
Performance	5.1	Travel speed, with/without load	(km/h)	10 / 10 <sup>15)</sup>
	5.2	Lifting speed, with/without load	(m/s)	0.107 / 0.174 (0.034 / 0.07) <sup>3)16)</sup>
	5.3	Lowering speed, with/without load	(m/s)	0.377 / 0.394 (0.084 / 0.084) <sup>3)16)</sup>
	5.8	Maximum climbing ability, with/without load	(%)	15.0 (10.0) / 20.0 <sup>1)</sup>
	5.9	Acceleration time, with/without load	(s)	6.1 / 4.8
	5.10	Service brake		Electro-magnetic
Drive	6.1	Drive motor rating S2 60 min	(kW)	3
	6.2	Lift motor rating at 53 15%	(kW)	2.2
	6.3	Battery according to DIN 43531/35/36 A,B,C,no		43 535 / B
	6.4	Battery voltage/rated capacity (5h)	(V)/(Ah)	24 / 345/375
	6.5	Battery weight (± 5%)	(kg)	287
	6.6	Power consumption according to VDI cycle	(kWh/h)	1.08
	6.7	Turnover output	(t/h)	48.0
	6.8	Energy consumption at turnover output	(kWh/h)	1.7
	8.1	Type of drive unit		LAC
	10.7	Sound pressure level LpAZ (at the driver's seat)	(dB(A))	69 <sup>16)</sup>

1) Load distribution e.g. 1000 kg on the forks, 1000 kg on the fork arms. Total load max. 2000 kg.)  
 2) 2000 kg on the load arms (initial lift)  
 3) Figures in parenthesis with initial lift  
 4) (± 5 mm)  
 5) Figures with battery, see line 6.4/6.5.  
 6) (± 10%)  
 7) Load: 2000 kg  
 8) Drive Wheel Option: rubber non marking, Polyurethane and wet grip

9) Solid rubber + polyurethane / polyurethane  
 10) Figures in parenthesis with tandem load wheels.  
 11) (-0/+5 mm)  
 12) Reach legs 75x150x1115  
 13) (± 2 mm)  
 14) Including a 200 mm (min.) operating aisle clearance.  
 15) (± 5%)  
 16) (± 2.5)

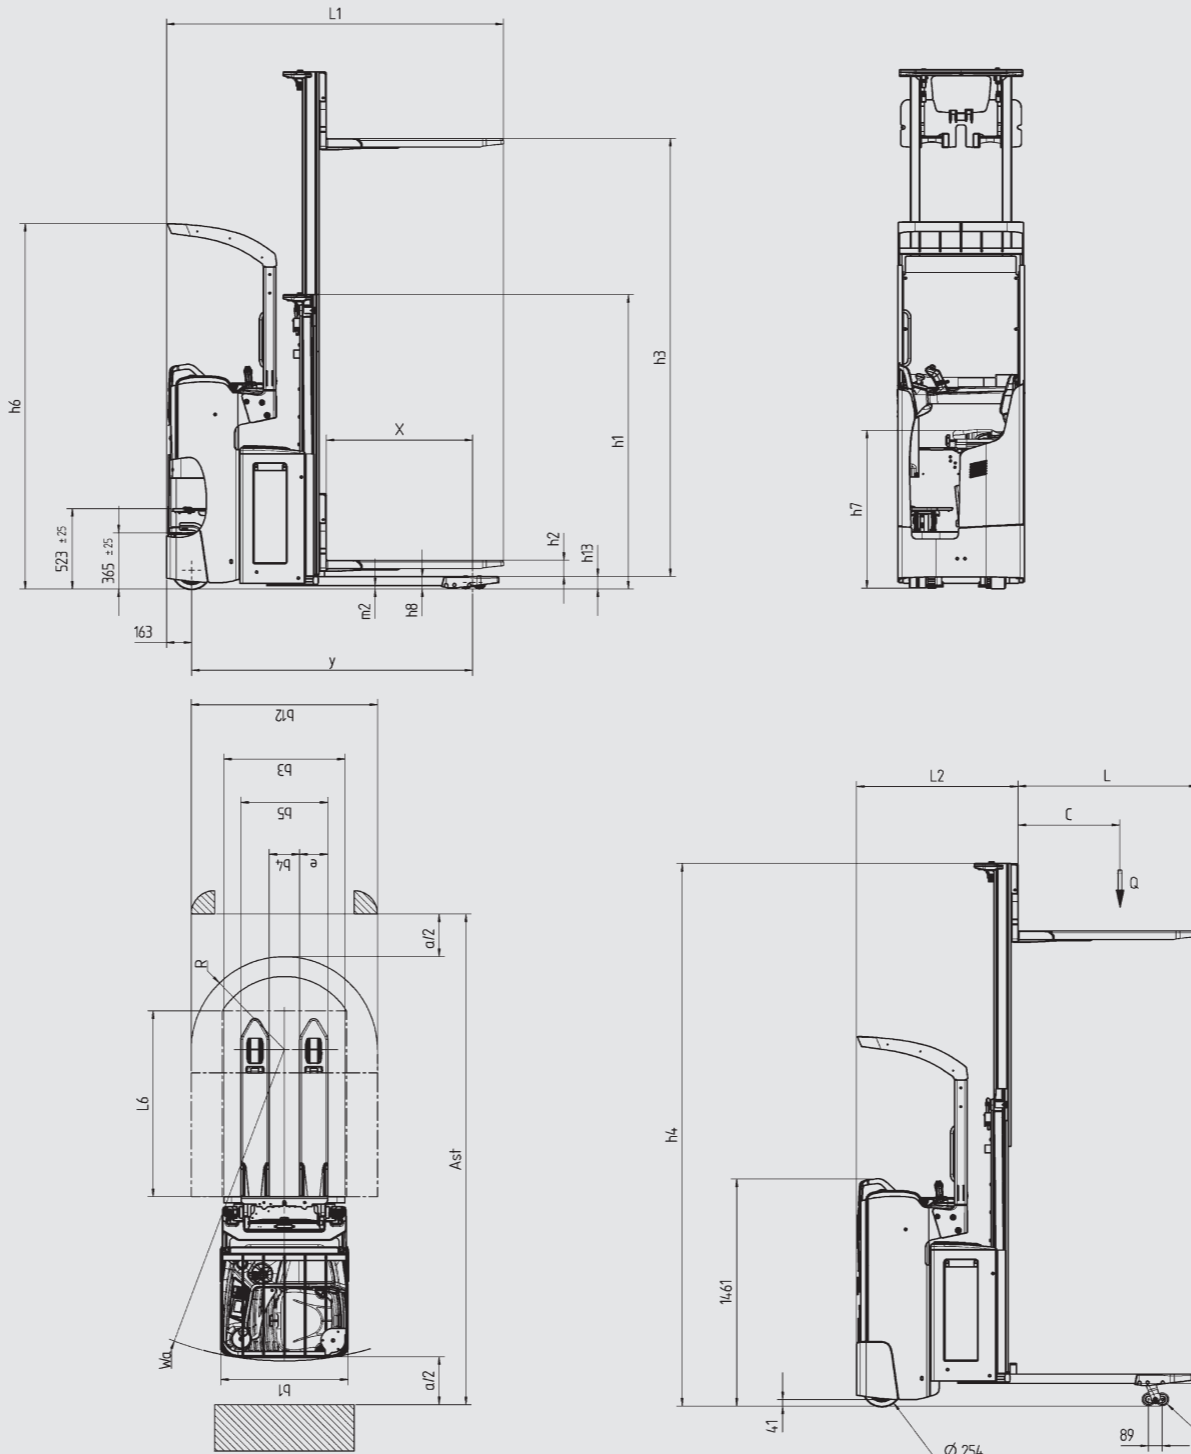

Mast D12 R (in mm)	1844 S	2344 S	1844 D	2344 D	
Lift	h3	1844	2344	1844	2344
Lift + fork height	h3+h13	1930	2430	1930	2430
Height, mast lowered	h1	1415	1665	1415	1665
Closed height (with free lift at 150 mm)	h1#	1490	1740	-	-
Height, mast extended	h4	2364	2864	2364	2864
Free lift	h2	150	150	895	1145

